

**FPH-MS SERIES GASOLINE-DRIVEN HYDRAULIC PUMPS**



700 bar  
Single-two speed  
1.8/0.9 - 7.9/0.9 cm<sup>3</sup> oil flow  
5 to 25 l reservoir

**FPH - MS**  
Series

**Gasoline-driven hydraulic pumps**

**When flexibility is a must.**

- The entire series is equipped with a protection cage that makes it easier to move and lift, protecting it in construction sites.
- Equipped with 4-stroke motor.
- Various sizes of reservoirs, from 5 to 40 litres, for use with a wide range of equipment and cylinders.
- 3 or 4-way manual, electric or pneumatic valves can also be mounted.
- Reduced maintenance. Designed to last.
- Hydraulic pumps are always supplied without couplers.

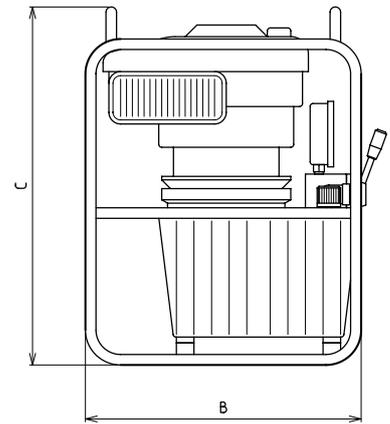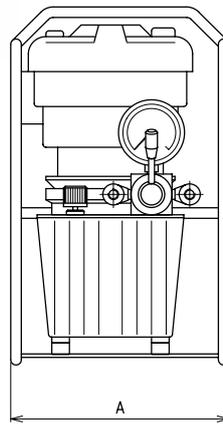

FPH-MS

MODEL	PRESSURE	FLOW RATE	MOTOR	DISPLACEMENT	KW RPM	RESERVOIR CAPACITY	DIMENSIONS in mm						WEIGHT
	1 <sup>st</sup> -2 <sup>nd</sup> STAGE	1 <sup>st</sup> -2 <sup>nd</sup> STAGE					bar	l/min	Cc	litres	A	B	
FPH 1 - MS	100 / 700	1.8 / 0.9	4-STROKE GASOLINE	161	3 / 3000	10	372	470	615	-	-	-	42
FPH 2 - MS		1.8	4-STROKE GASOLINE	190	2.6 / 3000		372	470	615	-	-	-	44
FPH 5 - MS		4.5 / 1.8	4-STROKE GASOLINE	190	2.6 / 3000		372	470	615	-	-	-	44
FPH 9 - MS		7.9 / 0.9	4-STROKE GASOLINE	161	2.6 / 3000		372	470	615	-	-	-	42