

BF901

Single section valve



Flow 90 l/min

Ports threads 3/4" BSP /

SAE 12

2 Inlet and Outlet ports

Prepared for High
pressure Carry Over
(Power Beyond)

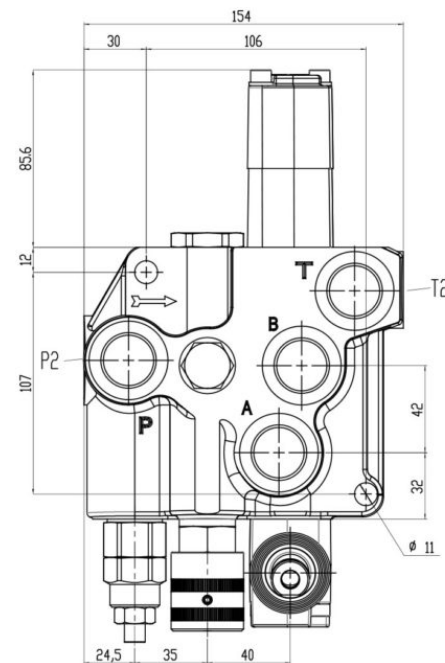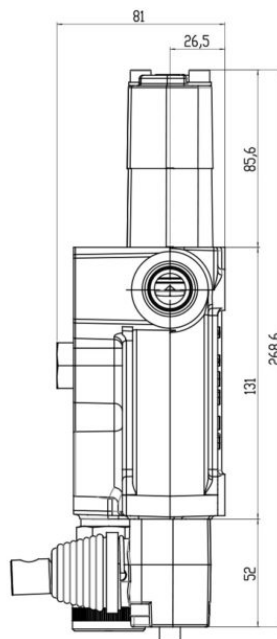

SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS

PORTATA NOMINALE / NOMINAL FLOW	90 L/min	24 GPM
PORTATA MAX / MAX FLOW	120 L/min	31,7 GPM
PRESSIONE NOMINALE / NOMINAL PRESSURE	250 bar	3600 PSI
PRESSIONE MAX SUGLI UTILIZZI / MAX PRESSURE ON PORTS	320 bar	4700 PSI

FILETTATURE STANDARD / STANDARD THREADS

	A - B	P	T	P2	T2
G (BSP)	3/4"	3/4"	3/4"	3/4"	3/4"
F (UNF - SAE 12)	1,1/16"-12	1,1/16"-12	1,1/16"-12	1,1/16"-12	1,1/16"-12

SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS

CONTROPRESSIONE MAX
ALLO SCARICO / MAX
PRESSURE ON TANK LINE

80 bar

1100
PSI

TRAFILAMENTI INTERNI / INTERNAL OIL LEAKAGE

A - B → T

4 ÷ 8
cc/min

CONDIZIONI DI TEST / TESTING CONDITIONS

PRESSIONE / PRESSURE

100 bar

TEMPERATURA DELL'OLIO / OIL
TEMPERATURE

40 °C

VISCOSITÀ DELL'OLIO / OIL VISCOSITY

32 mm²/s

DIMENSIONI / DIMENSIONS

N. DI SEZIONI
N. OF SECTIONS

L

I

mm

inch

mm

inch

BF901

155


6,10

105


4,13

PERDITE DI CARICO / PRESSURE DROP

P → T

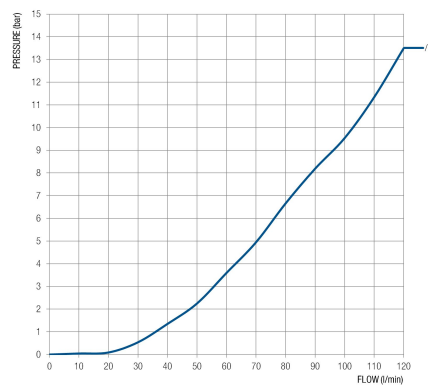

P → A - B

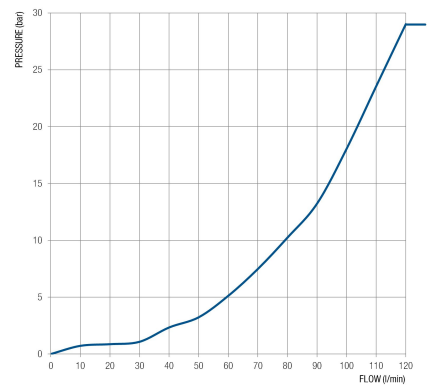

A - B → T

