

# ECM08B

# Monoblock directional control valve

DT.ECM08B.**01** 


### **FUNCTIONS AND BENEFITS**

- · Compact directional valve with low pressure losses.
- Interchangeable spools.
- Availability of manual, pneumatic and hydraulic actuations.

#### **TECHNICAL DATA**

Number of sections	1-7
Parallel spool stroke (mm-in)	<b>5.5</b> [0.22]
Float spool extra stroke (mm-in)	<b>4.5</b> [0.18]
Spool pitch (mm-in)	<b>36</b> [1.42]
Spool diameter (mm-in)	<b>14</b> [0.55]
Nominal flow (I/min-GPM)	<b>50</b> [12]
Operating pressure (bar-psi)	<b>350</b> [5000]



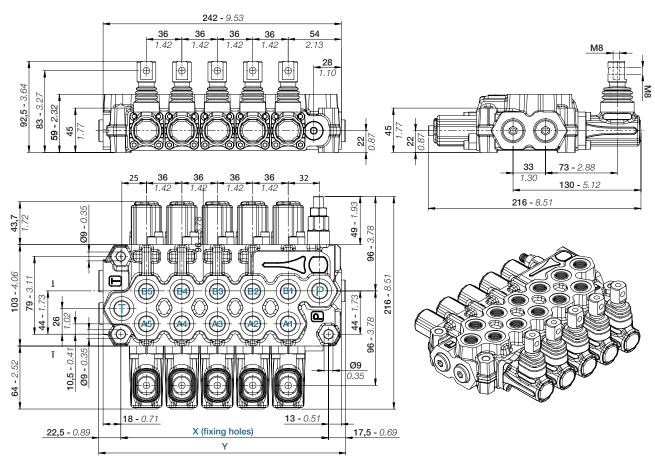

## **DIMENSIONS**

The dimensional drawing represents a ECM08B/5 with manual actuation and SAE connections.

TYPE	<b>BSP</b> (ISO 1179-1)	<b>UN-UNF</b> (ISO 11926-1)
INLET - P	G 3/8	3/4" - 16 UNF
PORTS - A/B	G 3/8	3/4" - 16 UNF
Hydraulic pilot	G 1/4	9/16" - 18 UNF
Pneumatic pilot	G 1/8	NPTF 1/8-27
OUTLET - T/T1	G 3/8	3/4" - 16 UNF

TYPE	X (mm / in)	<b>Y</b> (mm / in)
ECM08B/1	<b>67</b> - [2.64]	<b>107</b> - [4.22]
ECM08B/2	<b>103</b> - [4.06]	<b>143</b> - [5.63]
ECM08B/3	<b>139</b> - [5.48]	<b>179</b> - [7.05]
ECM08B/4	<b>175</b> - [6.90]	<b>215</b> - [8.47]
ECM08B/5	<b>211</b> - [8.31]	<b>251</b> - [9.89]
ECM08B/6	<b>247</b> - [9.73]	<b>287</b> - [11.30]
ECM08B/7	<b>283</b> - [11.15]	<b>323</b> - [12.73]



engineering beyond imagination

EBI MOTION CONTROLS
s.r.l. a socio unico
Operational HQ - Legal HQ Via
Andrea Costa, 11/2
40057 Cadriano
Granarolo dell'Emilia (Bo) - Italy
www.ebimc.com


# ECM08B


# Monoblock directional control valve




#### **TYPICAL CURVES**

All performances are obtained using mineral based hydraulic oil 46 cSt viscosity at 40°C (ISO VG46 viscosity class). All ECM08B go through functional testing at these conditions before shipment.

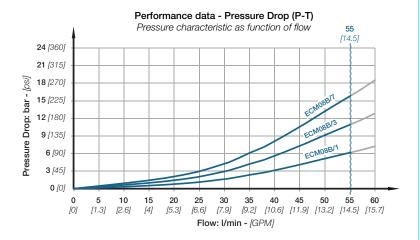

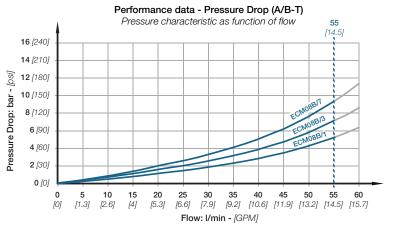

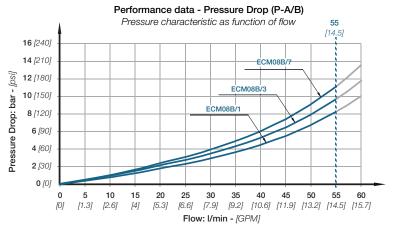

### **APPLICATIONS**

EBI motion controls provides a broad choice of monoblock directional control valves expertly developed and tested to meet different market sectors' needs.

ECM08B are suited for specialized applications for a variety of mobile equipment such as:







### **OPTIONAL FEATURES**

- All ECM08B can be easily trasformed from simple T port to HPCO configuration just by installing a conic plug G 1/4.
- On request all ECM08B monoblock control valves by EBI can be delivered painted (RAL 9005 black primer).
- To improve performance and controllability, a full range of hydraulic remote controls (joysticks and foot pedals) is available (see ESJ01A, ESJ02A, ESP02B, ect.)