

CETOP 3/NG06

STANDARD SPOOLS	CH. I PAGE 10
AD3E...	CH. I PAGE 11
AD3E...J*	CH. I PAGE 12
AD3E...KJ	CH. I PAGE 13
AD3V...	CH. I PAGE 14
AD3L...	CH. I PAGE 15
OTHER OPERATOR	CH. I PAGE 16
AD3P...	CH. I PAGE 17
AD3O...	CH. I PAGE 17
AD3M...	CH. I PAGE 18
AD3D...	CH. I PAGE 18
"D15" DC COILS	CH. I PAGE 19
"B14" AC SOLENOIDS	CH. I PAGE 19
STANDARD CONNECTORS	CH. I PAGE 20
"LE" VARIANTS	CH. I PAGE 21
LVDT	CH. I PAGE 22

DIRECTIONAL CONTROL VALVES CETOP 3/NG6

INTRODUCTION

The ARON directional control valves NG6 are designed for subplate mounting with an interface in accordance with UNI ISO 4401 - 03 - 02 - 0 - 94 standard (ex CETOP R 35 H 4.2-4-03), and can be used in all fields on account of their high flow rate and pressure capacities combined with compact overall dimensions.

The use of solenoids with wet armatures allows a very practical, safe construction completely dispensing with dynamic seals; the solenoid tube is screwed directly onto the valve chest whilst the coil is kept in position by means of a lock nut.

The special, precise construction of the ports and the improvement of the spools enables relatively high flow rates to be accommodated with a minimal pressure drop (Δp).

The operation of the directional valves may be electrical, pneumatic, oleodynamic, mechanical or lever.

The centre position is obtained by means of calibrated length springs which reposition the spool in the centre or end of travel position once the action of the impulse is over.

The solenoids are constructed with a protection class of IP66 to DIN 40050 standards and are available in either AC or DC form in different voltage and frequencies.

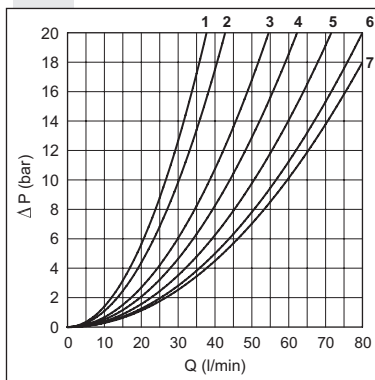
The new type DC coil "D15", of course their high performance, allows to increasing the limits of use respect to last series.

All types of electrical control are available, on request, with different types of manual emergency controls.

The solenoid coils are normally arranged for DIN 43650 ISO 4400 type connectors; is available on request these variant coils: with AMP Junior connections, with AMP junior and integrated diode, with Deutsch DT04-2P connections or solenoid with flying leads. Connectors with built in rectifiers or pilot lights are also available.

The valves are designed for use with DIN 51524 standard hydraulic mineral oils and it is recommended that filters should be fitted to ensure a maximum contamination level of class 10 in accordance with NAS 1638, $\beta_{25} \geq 75$.

PRESSURE DROPS



The diagram at the side shows the pressure drop curves for spools during normal usage. The fluid used is a mineral oil with a viscosity of 46 mm²/s at 40°C; the tests have been carried out at a fluid temperature of 40°C. For higher flow rates than those in the diagram, the losses will be those expressed by the following formula:

$$\Delta p_1 = \Delta p \times (Q_1/Q)^2$$

where Δp will be the value for the losses for a specific flow rate Q which can be obtained from the diagram, Δp_1 will be the value of the losses for the flow rate Q_1 that is used.

Spool type	Connections				
	P→A	P→B	A→T	B→T	P→T
01	5	5	5	5	
02	7	7	7	7	6
03	5	5	6	6	
04	2	2	2	2	4
44	1	1	2	2	3
05	7	7	5	5	
06	5	5	7	5	
66	5	5	5	7	
07		2	6		
08	6	6			
09		5		5	

Curve No.

Spool type	Connections				
	P→A	P→B	A→T	B→T	P→T
10	5	5	5	5	
11	5			5	
22		5	5		
12		5		6	
13		5	6	6	
14	4	3	3	3	4
28	3	4	3	3	4
15-19*	5	5	6	6	
16	5	5	4	4	
17-21*	3	4			
20*	4	4	4	4	

Curve No.

(*) Value with energized solenoid

ORDERING CODE

AD	Directional valve
3	CETOP 3/NG6
E	Type of operator For other operator see next pages
**	Spool see page I•10
*	Mounting type (table 1)
*	Voltage (table 2)
**	Variants (table 3)
*	Serial No.
3 = Standard	
4 = Only for RS - R6 - KJ - 7J variants	

TAB.2 - VOLTAGE

AC SOLENOID B14 **	
A	24V/50-60 Hz
B	48V/50-60 Hz
J	115V/50Hz - 120V/60Hz
Y	230V/50Hz - 240V/60Hz
K	AC without coils
Other voltages available on request.	
DC COIL D15 (30W) **	
L	12V
M	24V
V	28V*
N	48V*
Z	102V*
P	110V*
X	205V*
W	DC without coils






* Special voltage

** Technical data see page I • 19

• AMP Junior coils (with or without diode) and coils with flying leads and coils type Deutsch, are available in 12V or 24V DC voltage only.

• The coil with eCoat protection (RS variant) is available in 12V, 24V, 28V or 110V DC voltage only.

TAB.1- MOUNTING

STANDARD	
C	
D	
E	
F	
SPECIALS (WITH PRICE INCREASING)	
G	
H	
I	
L	
M	

• **Mounting type D** is only for valves with detent

• In case of **mounting D** with detent a maximum supply time of 2 sec is needed (only for AC coils).

TAB.3 - VARIANTS

VARIANT	CODE	◆	PAGE
No variant (without connectors)	S1(*)		
Viton	SV (*)		
Emergency control lever for directional control valves type ADC3 and AD3E	LE-LF-AX-CE(*)	◆	I•21
Emergency button	ES(*)		I•19
Rotary emergency button	P2(*)		I•19
Rotary emergency button (180°)	R5(*)		I•19
Preset for microswitch (E/F/G/H mounting only) (see below note ◇)	MS(*)	◆	I•11- I•15
5 micron clearance	SQ(*)	◆	
Spool movement speed control (only VDC) with ø 0.3 mm orifice	3S(*)	◆	I•12
Spool movement speed control (only VDC) with ø 0.4 mm orifice	JS(*)	◆	I•12
Spool movement speed control (only VDC) with ø 0.5 mm orifice	5S(*)	◆	I•12
Spool movement speed control (only VDC) with ø 0.6 mm orifice	6S(*)	◆	I•12
AMP Junior coil - for 12V or 24V DC voltage only	AJ(*)		I•19
AMP Junior coil and integrated diode - for 12V or 24V DC voltage only	AD(*)		I•19
Coil with flying leads (175 mm) - for 12V or 24V DC voltage only	SL		I•19
Hirschmann coil eCoat surface treatment - for 12V, 24V, 28V or 110V DC voltage only	RS(*)		I•19
Deutsch DT04-2P connection eCoat surface treatment - for 12V, 24V DC voltage only	R6		I•19
High corrosion resistance valve - Hirschmann connector	KJ		I•13
High corrosion resistance valve - Deutsch DT04-2P connector - for 12V, 24V DC voltage only	7J		I•13
Deutsch DT04-2P coil - for 12V or 24V DC voltage only	CZ		I•19
Other variants available on request.			
◇ = Maximum counter-pressure on T port: 8 bar - Microswitch type AM1107 code V79000001 can be ordered separately.			
◆ = Variant codes stamped on the plate			

(*) Coils with Hirschmann and AMP Junior connection supplied without connectors. The connectors can be ordered separately, ch. I page 20.