

FI



The Aston Seals FI type guide rings have been developed to substitute traditional bronze guides in hydraulic cylinders. They guide the rod and prevent metallic contact with the cylinder head when radial forces act perpendicular to the direction of movement.

Chamfered edges prevent splintering of the material during assembly and make the installation into the groove easier.

The compound used for these guides is a medium viscosity glass fibre reinforced acetal resin characterized by high strength, rigidity, hardness, impact resistance, resilience and excellent stability to high and low temperature.

- Extended service life
- Excellent wear-resistance
- Simple design of groove and assembly
- Reduce vibrations
- Low friction
- Good resistance to loads
- Good mechanical stability at high temperature
- Easy installation without expensive auxiliaries

MATERIAL




Type Acetal resin with glass fibre
Designation BEARITE

FIELD OF APPLICATION

Speed
≤ 1 m/s



Temperature
-40°C ÷ +110°C



Fluids

Hydraulic oils (mineral oil based)
For other fluids contact our technical department

SURFACE ROUGHNESS

Dynamic surface
Static surface

Ra ≤ 0.3 μm Rt ≤ 2.5 μm
Ra ≤ 2 μm Rt ≤ 10 μm

CHOICE OF GUIDE RING WIDTH

A rough estimate of guide width can be calculated with the following formula:


$$h_{mm} \geq \frac{F_N \times k}{p_{N/mm^2} \times d_{mm}}$$

where

- h_{mm} • Guide ring width in mm
- F_N • Radial load in N
- k • Safety factor (generally 2)
- d_{mm} • Rod diameter in mm
- p_{N/mm^2} • Surface pressure N/mm²
40 a 20 °C
30 a 70 °C

Before assembly good cleanliness and lubrication are recommended.


The above data are maximum values, they may be maintained for short periods and can not be used at the same time simultaneously.

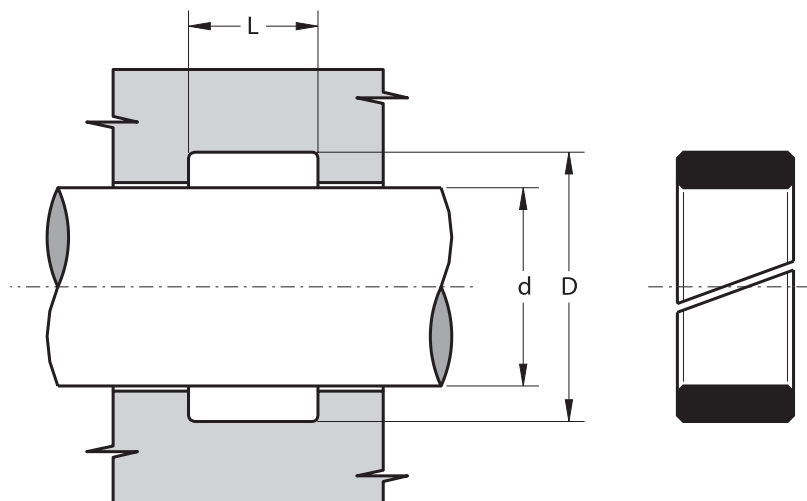

Part.	d ^{f7}	D ^{+0.05}	L ^{+0.25}
FI 12	12	16	9.6
FI 14	14	18	9.6
FI 15	15	19	9.6
FI 16	16	20	9.6
FI 16 20 5.6	16	20	5.6
FI 16 20 8	16	20	8.0
FI 18	18	22	9.6
FI 19 22 3.2	19	22	3.2
FI 20	20	24	9.6
FI 20 26 9.6	20	26	9.6
FI 22	22	26	9.6
FI 25	25	29	9.6
FI 25 31 9.6	25	31	9.6
FI 25.4 28.58 9.78	25.4	28.58	9.78
FI 26	26	30	9.6
FI 28	28	32	9.6
FI 28 31 5.6	28	31	5.6
FI 28 32 8.2	28	32	8.2
FI 30	30	34	9.6
FI 30 33 5.6	30	33	5.6
FI 30 36 9.6	30	36	9.6
FI 31.75 34.93 12.95	31.75	34.93	12.95
FI 31.75 38.1 12.95	31.75	38.1	12.95
FI 32	32	36	9.6

Part.	d ^{f7}	D ^{+0.05}	L ^{+0.25}
FI 32 35.1 4	32	35.1	4.0
FI 32 38 10	32	38	10.0
FI 34	34	38	9.6
FI 34.93 38.1 9.52	34.93	38.1	9.52
FI 35	35	39	9.6
FI 35 39 12.8	35	39	12.8
FI 35 41 9.6	35	41	9.6
FI 36	36	40	9.6
FI 36 40 12.2	36	40	12.2
FI 36 42 9.6	36	42	9.6
FI 38	38	42	9.6
FI 38.1 41.28 20.89	38.1	41.28	20.89
FI 40	40	44	9.6
FI 40 44 6.3	40	44	6.3
FI 40 46 9.6	40	46	9.6
FI 40 46 12.8	40	46	12.8
FI 41.27 47.62 12.7	41.27	47.62	12.7
FI 42	42	46	9.6
FI 44.45 47.5 20.89	44.45	47.5	20.89
FI 44.45 50.8 12.95	44.45	50.8	12.95
FI 45	45	51	9.6
FI 45 51 12.8	45	51	12.8
FI 46	46	52	9.6
FI 47.62 53.97 19.05	47.62	53.97	19.05

Part.	d ^{f7}	D ^{+0.05}	L ^{+0.25}
FI 47.63 50.8 9.52	47.63	50.8	9.52
FI 48	48	54	9.6
FI 50	50	56	9.6
FI 50.8 57.15 25.65	50.8	57.15	25.65
FI 50 56 12.8	50	56	12.8
FI 52	52	58	9.6
FI 52 60 20.5	52	60	20.5
FI 53	53	59	9.6
FI 55	55	61	9.6
FI 55 61 12.8	55	61	12.8
FI 56	56	62	12.8
FI 57.15 63.5 9.52	57.15	63.5	9.52
FI 57.15 63.5 12.95	57.15	63.5	12.95
FI 60	60	66	12.8
FI 60.33 63.5 9.52	60.33	63.5	9.52
FI 63	63	69	12.8
FI 63.5 69.85 12.7	63.5	69.85	12.7
FI 63.5 69.85 19.05	63.5	69.85	19.05
FI 63.5 69.85 25.65	63.5	69.85	25.65
FI 65	65	71	12.8
FI 66	66	72	12.8
FI 69.85 76.2 9.65	69.85	76.2	9.65
FI 69.85 76.2 12.95	69.85	76.2	12.95
FI 70	70	76	12.8

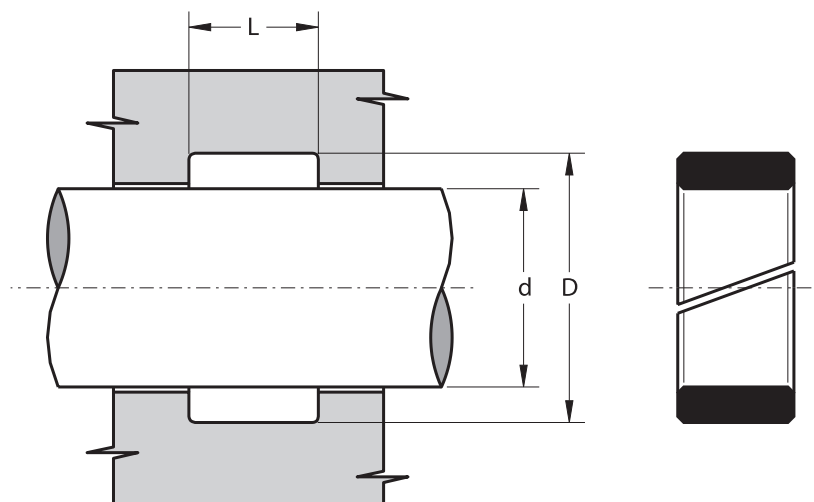


Part.	d ^{f7}	D ^{+0.05}	L ^{+0.25}
FI 72	72	78	12.8
FI 72 80 20.5	72	80	20.5
FI 73	73	79	12.8
FI 75	75	81	12.8
FI 76	76	82	12.8
FI 76.2 82.55 12.8	76.2	82.55	12.8
FI 78	78	84	12.8
FI 79.38 82.55 9.52	79.38	82.55	9.52
FI 80	80	86	12.8
FI 80 86 19.2	80	86	19.2
FI 82.55 88.9 19.3	82.55	88.9	19.3
FI 85	85	91	12.8
FI 86	86	92	12.8
FI 90	90	96	12.8
FI 90 96 19.2	90	96	19.2
FI 92 100 20.5	92	100	20.5
FI 95	95	101	12.8
FI 95.25 101.6 25.65	95.25	101.6	25.65
FI 98.43 101.6 9.52	98.43	101.6	9.52
FI 100	100	106	12.8
FI 105	105	111	12.8
FI 110	110	116	12.8
FI 112 120 20.5	112	120	20.5
FI 115	115	121	12.8

Part.	d ^{f7}	D ^{+0.05}	L ^{+0.25}
FI 120	120	126	12.8
FI 120 126 19.2	120	126	19.2
FI 120 126 25.4	120	126	25.4
FI 120.65 127 25.65	120.65	127	25.65
FI 123	123	129	12.8
FI 123.83 127 9.52	123.83	127	9.52
FI 125	125	131	12.8
FI 130	130	136	12.8
FI 130 136 25.4	130	136	25.4
FI 132 140 10.5	132	140	10.5
FI 132 140 20.5	132	140	20.5
FI 135	135	141	12.8
FI 140	140	146	12.8
FI 143	143	149	12.8
FI 145	145	151	12.8
FI 149.23 152.4 9.52	149.23	152.4	9.52
FI 150	150	156	12.8
FI 150 156 19.2	150	156	19.2
FI 152 160 20.5	152	160	20.5
FI 154	154	160	19.2
FI 155	155	161	19.2
FI 160	160	166	19.2
FI 160 164 10.2	160	164	10.2
FI 165	165	171	19.2

Part.	d ^{f7}	D ^{+0.05}	L ^{+0.25}
FI 170	170	176	19.2
FI 172 180 20.5	172	180	20.5
FI 175	175	181	19.2
FI 180	180	186	19.2
FI 180 184 10.2	180	184	10.2
FI 185	185	191	19.2
FI 190	190	196	19.2
FI 195	195	201	19.2
FI 200	200	206	19.2
FI 205	205	211	19.2
FI 210	210	216	19.2
FI 215	215	221	19.2
FI 216 220 10.2	216	220	10.2
FI 220	220	226	19.2
FI 225	225	231	19.2
FI 230	230	236	19.2
FI 235	235	241	19.2
FI 240	240	246	19.2
FI 245	245	251	19.2
FI 246 250 20.2	246	250	20.2
FI 250	250	256	19.2
FI 255	255	261	19.2
FI 260	260	266	19.2
FI 265	265	271	19.2

FI

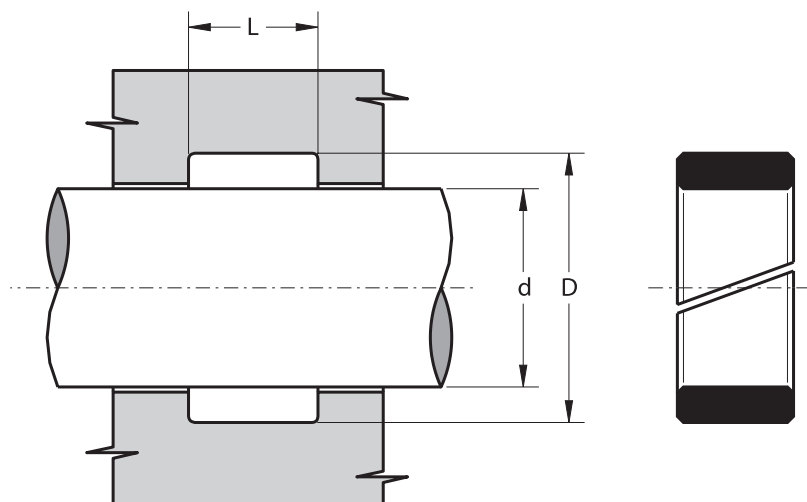

Part.	d ^{f7}	D ^{+0.05}	L ^{+0.25}
FI 270	270	276	19.2
FI 275	275	281	19.2
FI 280	280	286	19.2
FI 285	285	291	19.2
FI 290	290	296	19.2
FI 295	295	301	19.2