


IP-CF



CILINDRO DOPPIO EFFETTO PER CENTINA  
DOUBLE ACTING CURTAINSIDER CYLINDER  
DOPPELWIRKENDER ZYLINDER FÜR SPRIEGEL

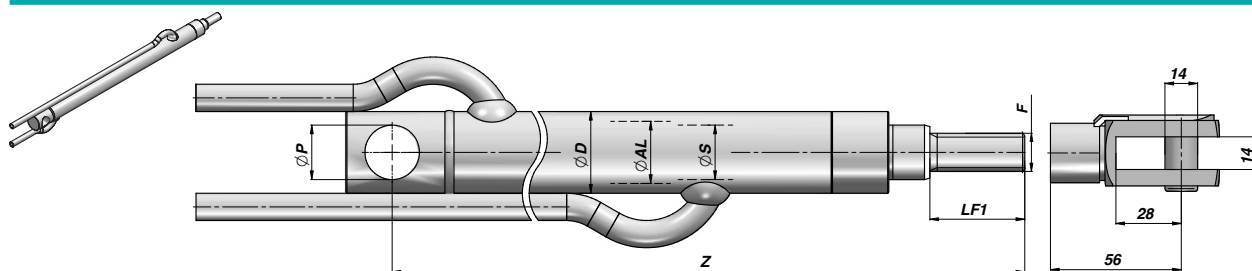


Codice Code Bestell-Nr.	ØD	ØAL	ØS	Corsa Stroke Hub	Z	ØP (+0,2 +0,3)	F	LF1	kg	OPTIONAL	
										Forcella Fork Gabel	Clip per forcella Lockable Pin Halteclip
IP07CEN2515002	30	25	20	1500	1650	20	M14x2	35	7,30	CFFF012334	CSAF012346
IP07CEN2512002	30	25	20	1200	1350	20	M14x2	35	6,10		
IP07CEN2510002	30	25	20	1000	1150	20	M14x2	35	5,30		
IP07CEN2508002	30	25	20	800	950	20	M14x2	35	4,40		
IP07CEN2506002	30	25	20	600	750	20	M14x2	35	3,60		

PRESSIONE MASSIMA - MAX. PRESSURE - MAX. DRUCK: 180 BAR  
TEMPERATURA C° - TEMPERATURE C° - TEMPERATURBEREICH C°: -15°C - +70°C  
VELOCITÀ MASSIMA - MAX SPEED - HÖCHSTGESCHWINDIGKEIT: MAX 0,5 M/S

IP-CB



CILINDRO DOPPIO EFFETTO PER CENTINA  
DOUBLE ACTING CURTAINSIDER CYLINDER  
DOPPELWIRKENDER ZYLINDER FÜR SPRIEGEL

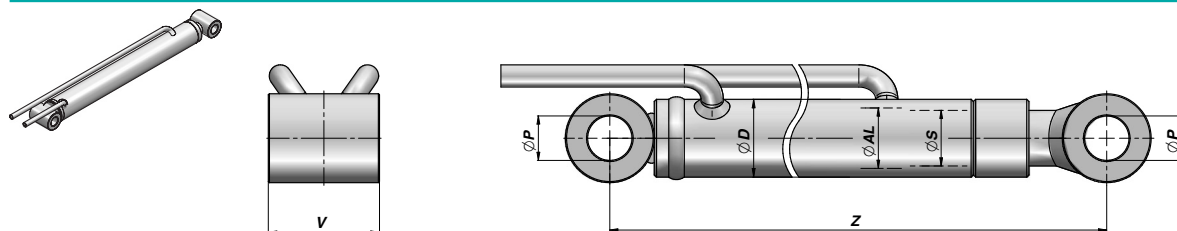

Codice Code Bestell-Nr.	ØD	ØAL	ØS	Corsa Stroke Hub	Z	ØP	V	kg
IP07CEN4015000	50	40	25	1500	1670	20,5	55	17,50

PRESSIONE MASSIMA - MAX. PRESSURE - MAX. DRUCK: 180 BAR  
TEMPERATURA C° - TEMPERATURE C° - TEMPERATURBEREICH C°: -15°C - +70°C  
VELOCITÀ MASSIMA - MAX SPEED - HÖCHSTGESCHWINDIGKEIT: MAX 0,5 M/S