



EXCHANGE PROGRAM

Prodotto / Product	Data / Date
Pompa per CIRCUITO CHIUSO Samhydraulik - Brevini Fluid Power HCV 070 S SX 420 HLR	February 05th 2021

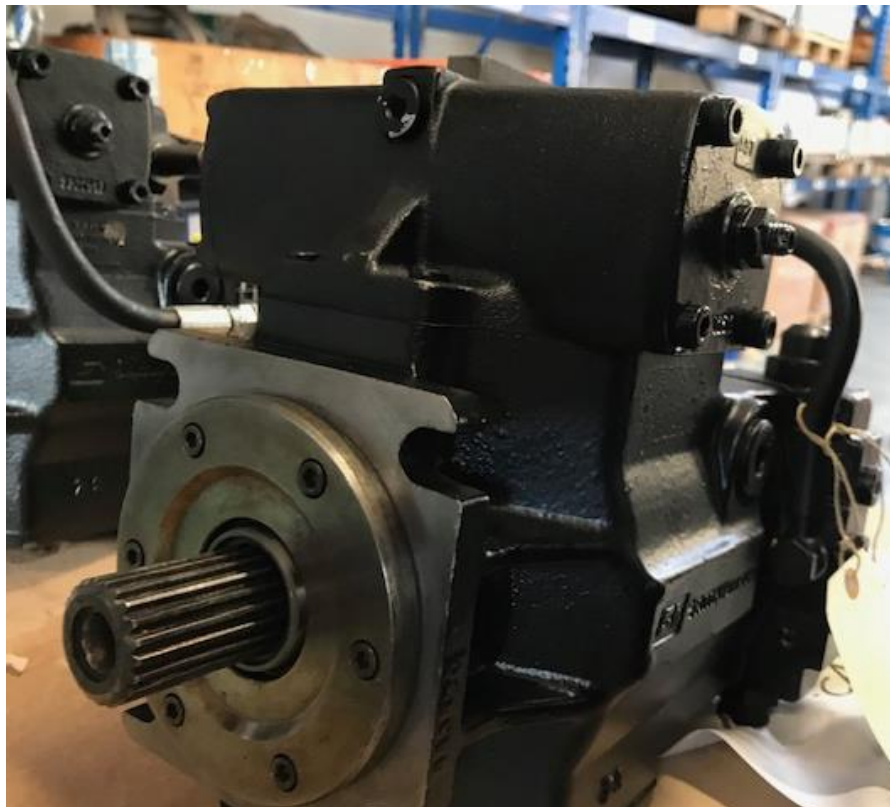

EXCHANGE PROGRAM

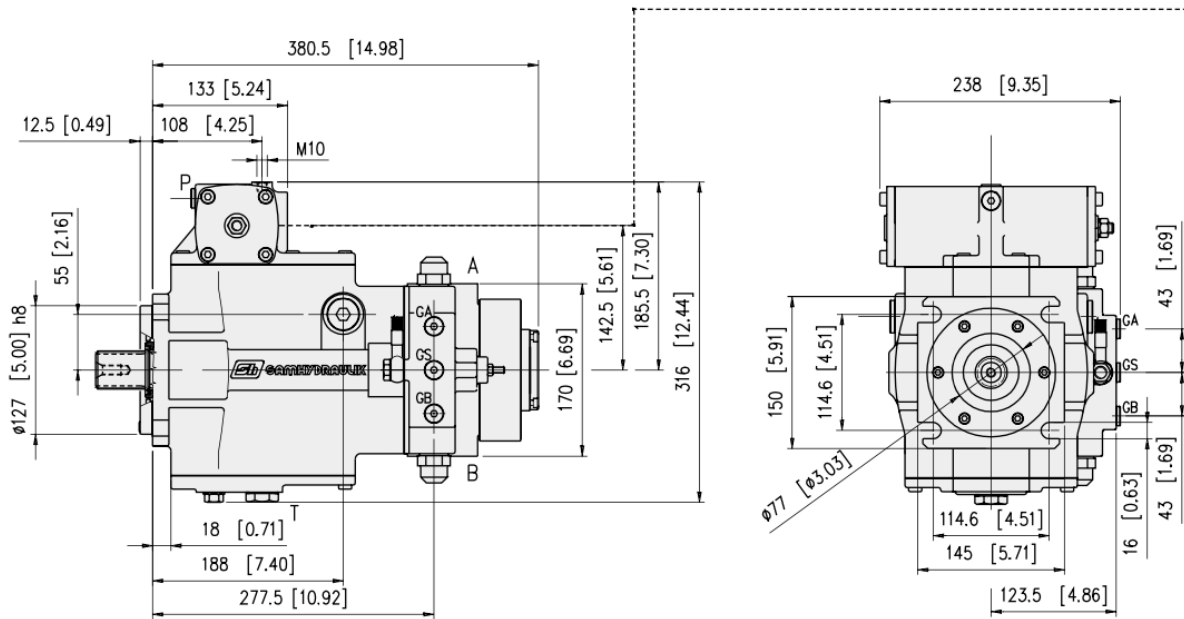

T: Tappo magnetico (scarico olio)

GA, GS, GB: Attacchi per manometri G 1/4" - Filetto utile 19 mm. [0.75 in]

A, B: Linee in pressione - 1" SAE 6000

L1, L2: Attacco drenaggio carcassa G 3/4" - Filetto utile 18 mm . [0.71 in]

FA: Attacco di aspirazione pompa ausiliaria G 1" - Filetto utile 19 mm. [0.71 in]

P: Attacco drenaggio G 1/4" - Filetto utile 12 mm. [0.47 in]

T: Magnetic plug (oil discharge) (scarico olio)


GA, GS, GB: G 1/4" pressure gauge ports - Thread depth 19 mm. [0.75 in]

A, B: Pressure ports - 1" SAE 6000

L1, L2: G 3/4" Case drain port - thread depth 18 mm. [0.71 in]

FA: G 1" Boost pump suction port - Thread depth 19 mm. [0.71 in]


P: G 1/4" Drain port - Thread depth 12 mm. [0.47 in]

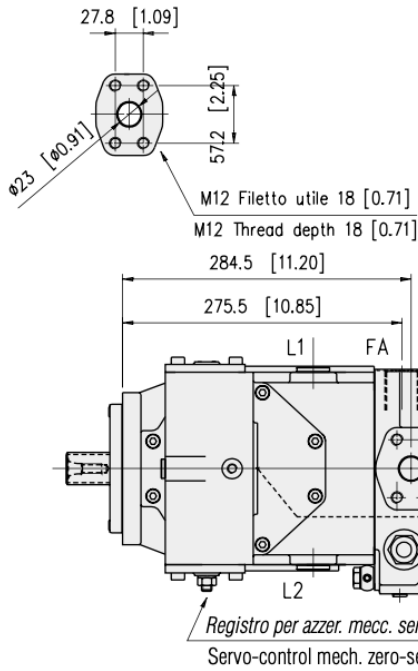

Regolazione pressione sovralimentazione

Boost pump pressure setting screw

REGOLATORE MANUALE A LEVA "HL"
MANUAL LEVEL CONTROL "HL"

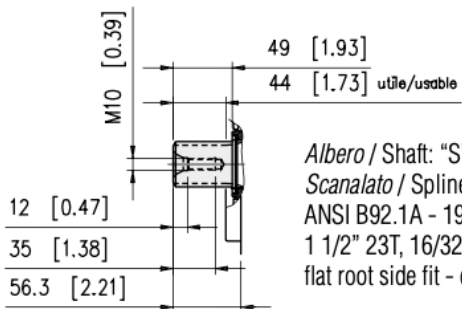

Albero / Shaft: "S"
Scanalato / Splined
ANSI B92.1A - 1976
1 1/2" 23T, 16/32 DP
flat root side fit - classe 5

