

BO

- SWINGING END
- SCHWINGENDE ENDE

MATERIALE: C45

- TRATTAMENTO DI TEMPRA AD INDUZIONE

art.	Ø d	Ø P	Ø B	L	L1	PESO
						Kg.
BO 11803	50	40	85	82	20	2,20
BO 11804	60	50	98	100	25	3,40
BO 11805	70	60	105	115	30	4,82

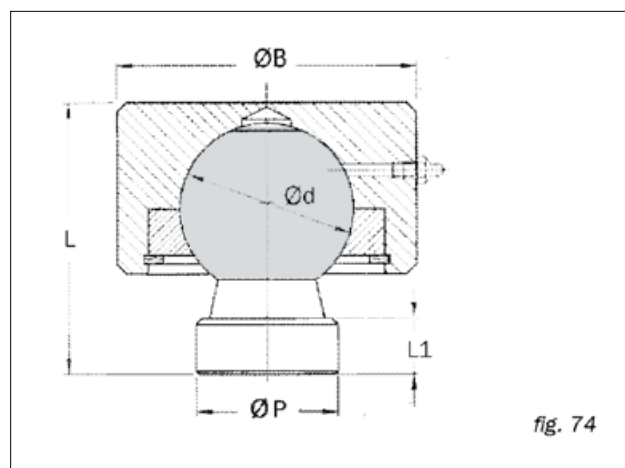


fig. 74

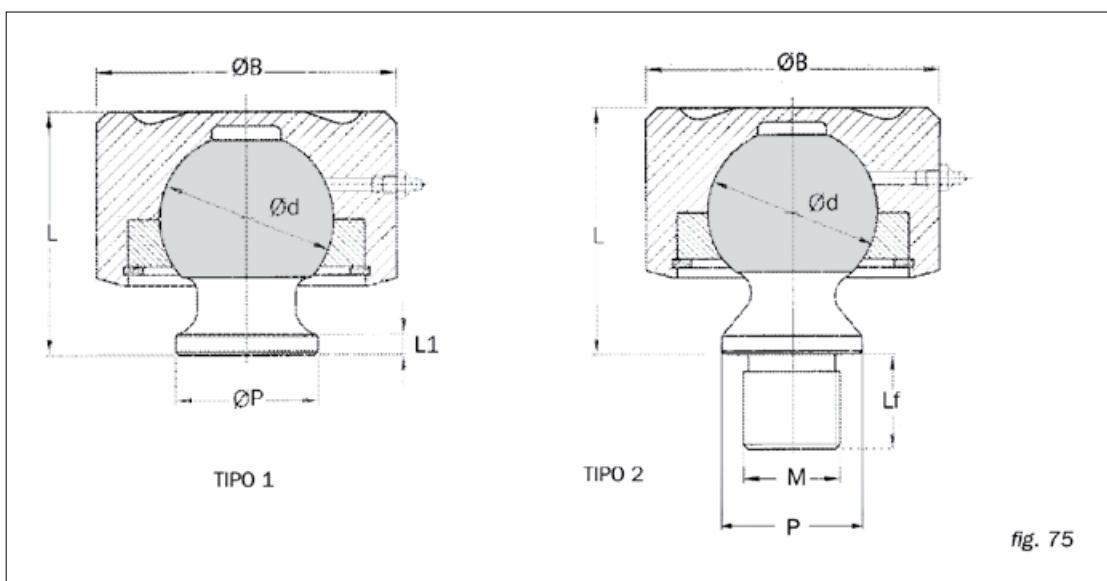


fig. 75

art.	Ø d	Ø P	Ø B	L	L1	M	Lf	TYPE	PESO
									Kg.
BO 11980	45	30	110	60	8	-	-	1	2,20
BO 11982	55	45	95	76	8	-	-	1	2,88
BO 11984	65	64	107	88	9	-	-	1	3,96
BO 11986	45	30	110	65	-	M22X1,5	26	2	2,42
BO 11988	55	45	95	77	-	M32X2	31	2	3,10

art.	Ø d	Ø P	Ø B	Ø S	L	L1	§	PESO
								Kg.
BO 11700	45	36	88	-	106	61	25	2,10
BO 11701	45	36	88	8,4	106	58,5	-	2,40
BO 11702	55	36	92	8,4	118,5	62	-	3,10

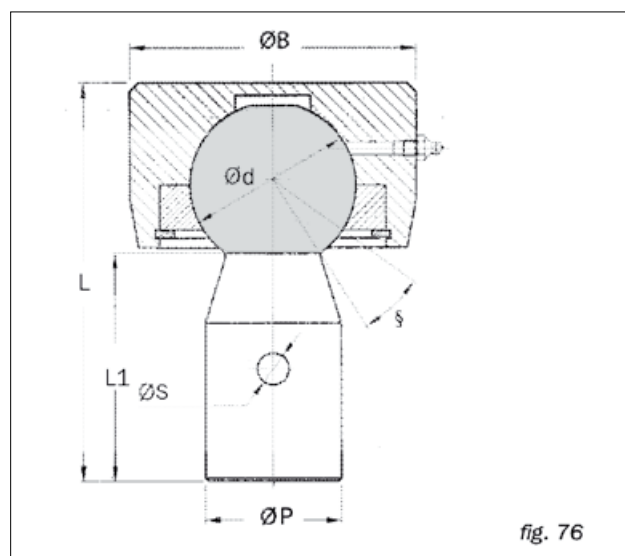


fig. 76