

PAT

- IMPLEMENT MOUNTING PIN
- AXE ATTACHEMENT OUTILS
- GERÄTEBOLZEN

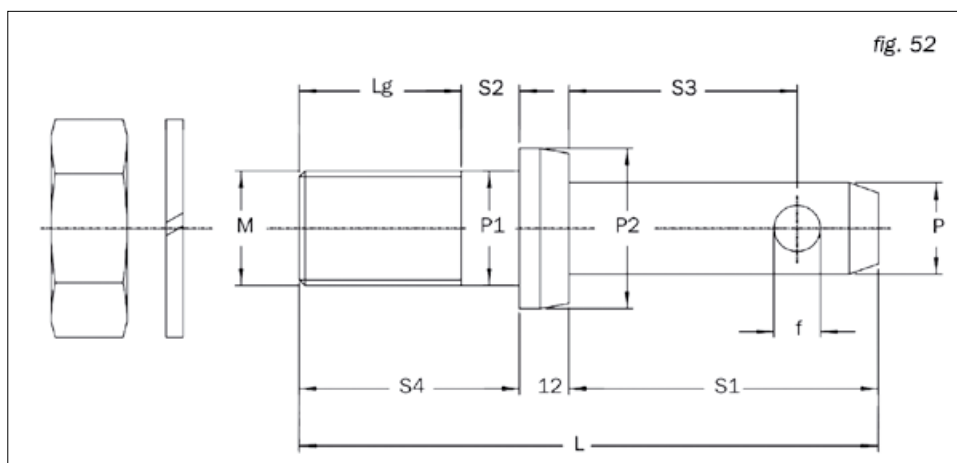


fig. 52

MATERIALE: ACCIAIO C40

art.	P	P1	P2	L	S1	S2	S3	S4	M	Lg	f	IMPIEGO	PESO
													Kg.
PAT 1000	22	28	38	140	74	14	50	54	M22x1,5	40	12	UNIVERSALE	0,54
PAT 1010	28	28	44	150	78	20	60	60	M22x1,5	40	12	UNIVERSALE	0,80
PAT 1020	22	22	38	140	74	14	50	54	M22x1,5	40	12	UNIVERSALE	0,52
PAT 1025	22	20	38	140	74	14	50	54	M20x1,5	40	12	UNIVERSALE	0,50
PAT 1030	28	22	44	150	78	14	60	60	M22x1,5	46	12	UNIVERSALE	0,76
PAT 1035	22	30	44	136	78	12	52	46	M30x2	34	12	CELLI	0,82
PAT 1036	28	30	44	136	78	12	52	46	M30x2	34	12	CELLI	0,98
PAT 1038	22	24	40	140	74	18	50	54	M22x1,5	40	12	MASCHIO	0,52
PAT 1040	28	24	44	144	78	18	60	54	M22x1,5	40	12	MASCHIO	0,72
PAT 1042	22	25	40	140	74	14	50	54	M22x1,5	40	12	SICMA	0,54
PAT 1044	28	25	44	144	78	14	60	54	M22x1,5	40	12	SICMA	0,74
PAT 1046	22	27	40	140	74	18	50	54	M22x1,5	40	12	NARDI	0,54
PAT 1048	28	27	44	144	78	18	60	54	M22x1,5	40	12	NARDI	0,74