



30
kN

60 \varnothing 25
mm

3/8"
BSP

250
bar

3/8"
BSP

200
bar

300
bar

15
kN

900
nm

19
kg

20
l/min

Hydraulic rotator FHR 3.000L is cost-effective solution generally for seasonal use in forestry, agriculture, general cargo and material handling.

Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 60mm and the knuckle pin diameter 25mm.



FHL 01-A/B-60/25






FHL 01B-A/B-60/25

Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 49.5mm and the fixing pin (not included) diameter 30mm

49.5 \varnothing 30
mm

3/8"
BSP

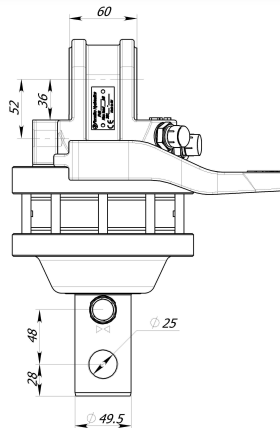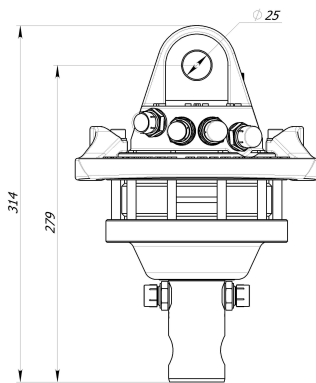

On request by special conditions there are metric nipples available for rotator FHR 3.000L

FORESTRY GENERAL CARGO AGRICULTURE



Hydraulic rotator FHR 3.000L is cost-effective solution generally for seasonal use in forestry, agriculture, general cargo and material handling.



Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 60mm and the knuckle pin diameter 25mm.



Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 49.5mm and the fixing pin (not included) diameter 30mm



Rotator FHR 3.000L based on reliable vane type hydraulic motor which delivers torque up to 900Nm at 25MPa.



Fomoko rotator FHR 3.000L is compatible with FHL 01-A/B-60/25 and FHL 01B-A/B-60/25 series links.



Rotator for shipping is packed in compact solid cardboard box with dimensions 340x230x240mm.



We providing TWO year warranty for this rotator.

On request by special conditions there are metric nipples available for rotator FHR 3.000L

FORESTRY GENERAL CARGO AGRICULTURE

