









45 kN	 L73 ϕ 25 mm	 R 3/8" BSP	 R 250 bar	 GO/GC 3/8" BSP	 GO 200 bar	 GC 300 bar
22.5 kN						
1300 nm						
26 kg						
20 l/min						

Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 73mm and the knuckle pin diameter 25mm.

Hydraulic rotator FHR 4.500L/68 is cost-effective solution generally for seasonal use in forestry, agriculture, road and building construction, general cargo and material handling.








FHL 01-A/B-73/25



FHL 01B-A/B-73/25

Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or adaptor and by fixing with pin. Axle (shaft) diameter is 68mm and the fixing pin (not included) diameter 30mm

 ϕ 68 ϕ 30 mm	 GO/GC 3/8" BSP
--	---

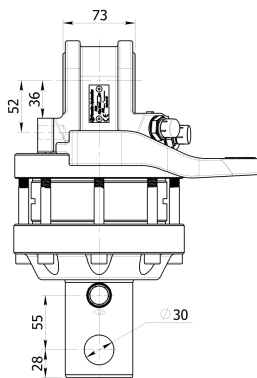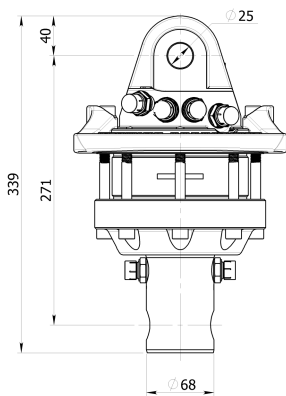

On request by special conditions there are metric nipples available for rotator FHR 4.500L/68



Hydraulic rotator FHR 4.500L/68 is cost-effective solution generally for seasonal use in forestry, agriculture, road and building construction, general cargo and material handling.



Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 73mm and the knuckle pin diameter 25mm.



Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 68mm and the fixing pin (not included) diameter 30mm



Rotator FHR 4.500L/68 based on reliable vane type hydraulic motor which delivers torque up to 1300Nm at 25MPa.



Fomoko rotator FHR 4.500L/68 is compatible with FHL 01-A/B-73/25 and FHL 01B-A/B-73/25 series links.



Rotator for shipping is packed in compact solid cardboard box with dimensions 340x230x240mm.



We providing TWO year warranty for this rotator.

On request by special conditions there are metric nipples available for rotator FHR 4.500L/68

FORESTRY GENERAL CARGO AGRICULTURE CONSTRUCTION

