

Codice-Code: TAGLTT30PI

La **TT30PI** è una taglierina pneumatica, alimentata ad aria max 6 bar, ideale per il taglio dei tubi flessibili bassa pressione e tessili con capacità fino a 5/8".


CARATTERISTICHE PRINCIPALI

- Alimentazione pneumatica 6 bar.

TT30PI is a pneumatic cutting machine (max 6 bar), ideal for cutting low pressure and textile hoses up to 5/8".

MAIN FEATURES

- Pneumatically operated (6 bar).

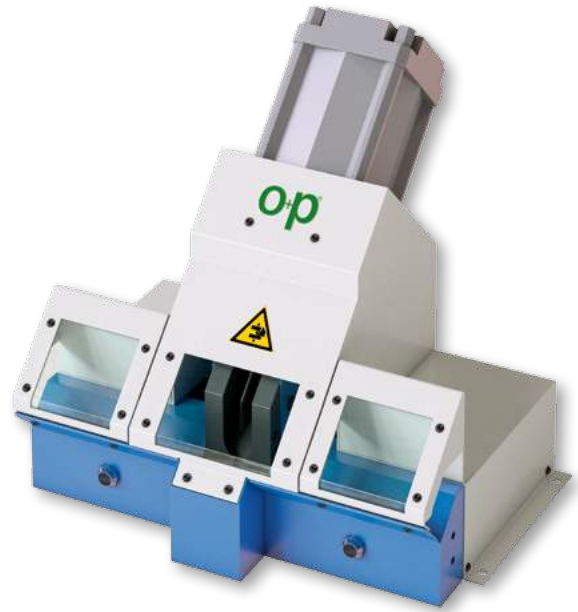
DATI TECNICI - TECHNICAL DATA


Ø MASSIMO - MAX Ø	30 mm (1.181")
DIMENSIONI LxPxH - DIMENSIONS LxWxH	550x440x470 mm (21.654"x17.323"x18.504")
PESO - WEIGHT	49 Kg (108 Lbs)

OPTIONAL - OPTIONAL


PEDALE - PEDAL



CANALINA - MEASURING HOSE HOLDER

Codice-Code: BLADES

LAME DENTELLATE E LISCE*
SMOOTH AND TOOTHED CUTTING BLADES*

DATI TECNICI - TECHNICAL DATA

DIMENSIONI - DIMENSIONS (EXT Ø X W X INT. Ø)

Ø 200 x 2,5 x 32
Ø 250 x 3 x 40 (TF2, TF2/E, TF1/E, TF1 ECO)
Ø 275 x 3 x 40
Ø 300 x 3 x 50
Ø 350 x 3 x 50
Ø 400 x 4 x 50 (TF4, TF3, TF3 PI)
Ø 520 x 4 x 50 (TF5, TUBOCUT5)
Ø 650 x 6 x 80 (TF6)


* Lame lisce disponibili su richiesta - **Smooth blades available upon request**

LAME DIAMANTATE

Dischi diamantati per applicazioni speciali. Ø disponibili: 400 mm, 520 mm e 650 mm. Ideali per taglio tubi con spirale in acciaio tipo SAE 100R4, ossia tubi in gomma spiralati lisci, idonei per aspirazione e mandata di fluidi idraulici, oli minerali e carburanti. Adatti anche per tubi rinforzati con singola spirale metallica incorporata con tessuti sintetici ad alta resistenza.

DIAMOND BLADES

Diamond blades for special applications. Available Ø: 400 mm, 520 mm and 650 mm. They are ideal for cutting steel spiral hoses type SAE 100R4, that are hardwall smooth rubber hoses suitable for suction and delivery of hydraulic fluids, mineral oil and fuels. They can be also used for cutting reinforced hoses with single steel wire spiral with high strength synthetic textile plies.

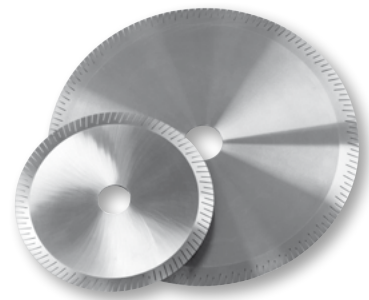

LAMA DIAMANTATA
DIAMOND BLADE