
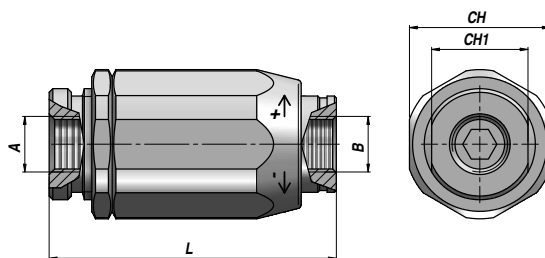


VALVOLA DI STROZZAMENTO REGOLABILE (TENUTA A CONO)

ADJUSTABLE THROTTLE-CHECK VALVE (POPPET TYPE)
EINSTELLBARES DROSSELVENTIL (KEGELSPERRUNG)

VRFC



Codice Code Bestell-Nr.	A BSP	B BSP	Q MAX l/min A>B	Q MAX l/min B>A	P MAX bar	Tipo Type Typ	L	CH	CH1	kg
VSG512.100000	1/4"	1/4"	30	30	350	VRFC 010	66	32	22	0,30
VSG512.200000	3/8"	3/8"	40	50	350	VRFC 020	77,5	38	26	0,48
VSG512.300000	1/2"	1/2"	50	80	350	VRFC 030	83	41	30	0,59
VSG512.400000	3/4"	3/4"	80	110	300	VRFC 040	104	55	38	1,34
VSG512.500000	1"	1"	110	160	250	VRFC 050	118,5	65	46	2,15
VSG512.600000	1"1/4	1"1/4	150	210	230	VRFC 060	135	80	55	3,31
VSG512.700000	1"1/2	1"1/2	210	280	230	VRFC 070	149,5	90	62	4,76

MONTAGGIO IN LINEA
LINE MOUNTING
REIHENMONTAGE



MATERIALE - MATERIAL: ACCIAIO - STEEL - STAHL

UNIDIREZIONALE
UNIDIRECTIONAL
EINSEITIG GERICHTET

VALVOLA DI STROZZAMENTO REGOLABILE

ADJUSTABLE THROTTLE VALVE
EINSTELLBARES DROSSELVENTIL

VRB

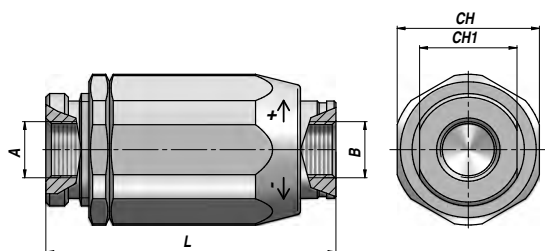

Codice Code Bestell-Nr.	A BSP	B BSP	Q MAX l/min	P MAX bar	Tipo Type Typ	L	CH	CH1	kg
VSG515.100000	1/4"	1/4"	30	350	VRB 010	66	32	22	0,30
VSG515.200000	3/8"	3/8"	45	350	VRB 020	77,5	38	26	0,48
VSG515.300000	1/2"	1/2"	70	350	VRB 030	83	41	30	0,59
VSG515.400000	3/4"	3/4"	100	300	VRB 040	104	55	38	1,34
VSG515.500000	1"	1"	150	250	VRB 050	118,5	60	46	2,15

MONTAGGIO IN LINEA
LINE MOUNTING
REIHENMONTAGE

MATERIALE - MATERIAL: ACCIAIO - STEEL - STAHL

BIDIREZIONALE
BIDIRECTIONAL
BEIDSEITIG GERICHTET