


CALORSTAR R /210°C

STEEL WIRE REINFORCEMENT STEAM HOSE 17BAR- BS 5342 -2A

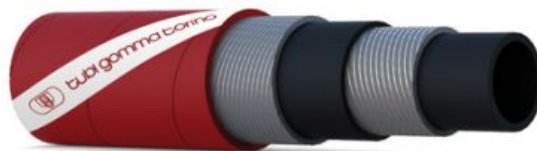

APPLICATION

Delivery hose for high pressure saturated steam, suitable for tanks and pipelines steam cleaning in the petrochemical industry

TUBE

Black, smooth, **EPDM** rubber compound

REINFORCEMENT

High tensile strength steel reinforcements

COVER

Red, smooth, cloth impression **EPDM** rubber compound, abrasion, ozone and weather resistant

WORKING TEMPERATURE

-40°F + 410°F peaks 450°F

SPECIFICATIONS

BS 5342 :85 TYPE 2 CLASS A

									
ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
13	1/2	25	1	0,53	17	255	170	2550	40/61
16	5/8	28	1 3/32	0,60	17	255	170	2550	40/61
19	3/4	32	1 1/4	0,76	17	255	170	2550	40/61
25	1	38	1 1/2	0,98	17	255	170	2550	40/61
32	1 1/4	46	1 13/16	1,29	17	255	170	2550	40/61
38	1 1/2	54	2 1/8	1,76	17	255	170	2550	40/61
51	2	67	2 41/64	2,18	17	255	170	2550	40/61
63	2 1/2	83	3 9/32	3,40	17	255	170	2550	40/61
76	3	96	3 25/32	4,35	17	255	170	2550	40/61
102	4	124	4 7/8	7,00	17	255	170	2550	40/61

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING


CALORSTAR
W.P. 17 BAR
210°C
BS 5342 type 2A
**DRAIN
AFTER USE**
Q/Y
ITALY


tubi gomma torino