


SILAR

WATER COOLING DELIVERY HOSE FOR HIGH TEMPERATURE

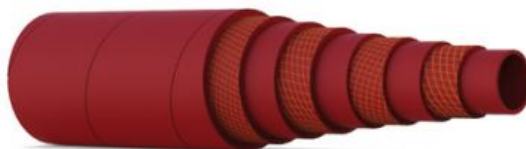

APPLICATION

Delivery hose for hot water and coolant fluid, applied in engine cooling systems where resistance to high working temperature is required

TUBE

Red, smooth, **VMQ** silicon (available also in many other colors)

REINFORCEMENT


NOMEX fibers

COVER

Red, smooth, cloth impression silicon **VMQ**, high temperature and weather resistant (available also in many other colors)

WORKING TEMPERATURE

-58° F + 482° F

								
ID		OD		WP		BP		COIL LENGTH
mm	inch	mm	inch	bar	psi	bar	psi	m
12	15/32	22	7/8	10	150	30	450	1/20
18	23/32	28	1 3/32	10	150	30	450	1/20
20	25/32	30	1 3/16	10	150	30	450	1/20
22	7/8	32	1 1/4	10	150	30	450	1/20
25	1	35	1 3/8	10	150	30	450	1/20
28	1 3/32	38	1 1/2	10	150	30	450	1/20
30	1 3/16	40	1 9/16	10	150	30	450	1/20
32	1 1/4	42	1 21/32	10	150	30	450	1/20
35	1 3/8	45	1 25/32	10	150	30	450	1/20
38	1 1/2	48	1 7/8	10	150	30	450	1/20
40	1 9/16	50	1 31/32	10	150	30	450	1/20
42	1 21/32	52	2 1/16	8	120	24	360	1/20
45	1 25/32	55	2 5/32	8	120	24	360	1/20
48	1 7/8	58	2 9/32	8	120	24	360	1/20
50	1 31/32	60	2 3/8	8	120	24	360	1/20
51	2	61	2 13/32	8	120	24	360	1/20
55	2 5/32	65	2 9/16	4	60	12	180	1/20
60	2 3/8	70	2 3/4	4	60	12	180	1/20
63,5	2 1/2	73,5	2 29/32	4	60	12	180	1/20
70	2 3/4	80	3 5/32	4	60	12	180	1/20
76	3	86	3 3/8	4	60	12	180	1/20
80	3 5/32	90	3 17/32	4	60	12	180	1/20
90	3 17/32	100	3 15/16	4	60	12	180	1/20
102	4	112	4 13/32	4	60	12	180	1/20

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.