


CALORSTAR R /210°C ISO 6134 2A

STEEL WIRE REINFORCEMENT. STEAM HOSE 18 BAR- ISO 6134 -2A

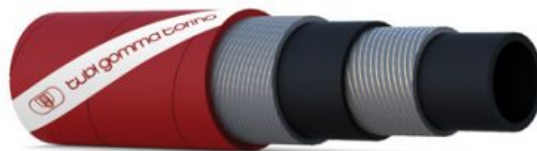

APPLICATION

Delivery hose for high pressure saturated steam, suitable for tanks and pipelines steam cleaning in the petrochemical industry

TUBE

Black, smooth, **EPDM** rubber compound

REINFORCEMENT

High tensile strength steel reinforcements

COVER

Red, smooth, pinpricked, cloth impression synthetic rubber compound, abrasion, ozone and weather resistant

WORKING TEMPERATURE

-40°F + 410°F peaks 450°F

SPECIFICATIONS

ISO 6134 - TYPE 2 CLASS A

									
ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
13	1/2	25	1	0,53	18	270	180	2700	40/61
16	5/8	30	1 1/16	0,75	18	270	180	2700	40/61
19	3/4	33	1 19/64	0,78	18	270	180	2700	40/61
25	1	40	1 19/32	1,03	18	270	180	2700	40/61
32	1 1/4	48	1 29/32	1,41	18	270	180	2700	40/61
38	1 1/2	54	2 1/8	1,78	18	270	180	2700	40/61
51	2	69	3 23/32	2,58	18	270	180	2700	40/61
63	2 1/2	81	3 13/64	3,16	18	270	180	2700	40/61
76	3	94	3 45/64	4,02	18	270	180	2700	40/61
102	4	122	4 13/16	6,22	18	270	180	2700	40/61

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING


CALORSTAR
ISO EN6134 2A
M
W.P. 18 BAR
210°C
DRAIN AFTER USE
QTY
ITALY

tubi gomma torino