


## ABRABULK SW /40

DELIVERY HOSE FOR ABRASIVE MATERIALS

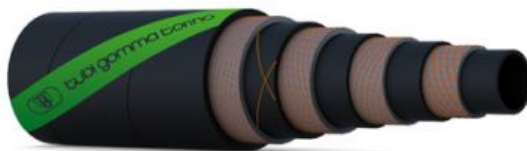

### APPLICATION

Delivery hose for bulk abrasives materials, docks and oil rigs services

### TUBE

Black, smooth, **NR** rubber compound highly resistant to abrasion

### REINFORCEMENT

High strength synthetic cord, with 2 crossing copper wires for hose grounding

### COVER

Black, smooth cloth impression, **CR** rubber compound, resistant to oil, grease, sea water, ozone and flame retardant

### WORKING TEMPERATURE

-22°F + 176°F

### SPECIFICATIONS

DIN 53516 50 ± 5mm<sup>3</sup>

ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
127	5	160	6 19/64	8,50	40	600	160	2400	MAX 60
152	6	185	7 9/32	10,50	40	600	160	2400	MAX 60

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

### BRANDING

