


SILFLEX

WATER COOLING SUCTION AND DELIVERY HOSE FOR HIGH TEMPERATURE - HELIX GROOVED COVER

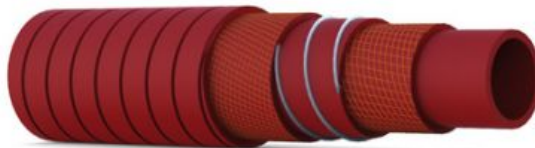

APPLICATION

Suction and delivery hose for hot air and water, applied in engine cooling systems with very narrow routings

TUBE

Red, smooth, **VMQ** silicon (available also in many other colors)

REINFORCEMENT

High strength synthetic plies, with steel wire spirals

COVER

Red, helix grooved, cloth impression silicon **VMQ**, high temperature and weather resistant

WORKING TEMPERATURE

-58° F + 392° F

ID		OD		WP		BP		BENDING RADIUS	VACUUM	COIL LENGTH
mm	inch	mm	inch	bar	psi	bar	psi	mm	bar	m
15	19/32	23	29/32	5	75	15	225	55	0,8	20
19	3/4	27	1 1/16	5	75	15	225	70	0,8	20
20	25/32	28	1 1/32	5	75	15	225	70	0,8	20
25	1	33	1 19/64	5	75	15	225	85	0,8	20
27	1 1/16	35	1 3/8	5	75	15	225	95	0,8	20
28	1 3/32	36	1 13/32	5	75	15	225	95	0,8	20
32	1 1/4	42	1 21/32	5	75	15	225	105	0,8	20
35	1 3/8	45	1 25/32	5	75	15	225	115	0,8	20
38	1 1/2	48	1 7/8	5	75	15	225	130	0,8	20
45	1 25/32	55	2 5/32	3,5	50	10	150	150	0,8	20
51	2	61	2 13/32	3,5	50	10	150	165	0,8	20
55	2 5/32	65	2 9/16	3,5	50	10	150	180	0,8	20
60	2 3/8	70	2 3/4	3,5	50	10	150	200	0,8	20
63,5	2 1/2	73,5	2 29/32	3,5	50	10	150	220	0,8	20
70	2 3/4	80	3 5/32	3,5	50	10	150	245	0,8	20
76	3	86	3 3/8	3,5	50	10	150	270	0,8	20
80	3 5/32	90	3 17/32	3,5	50	10	150	280	0,8	20
90	3 17/32	100	3 15/16	3,5	50	10	150	320	0,8	20
102	4	113	4 7/16	3,5	50	10	150	360	0,8	20
127	5	138	5 7/16	3,5	50	10	150	480	0,8	20
152	6	163	6 13/32	3,5	50	10	150	580	0,8	20

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.