


## SILSPIR

WATER COOLING SUCTION AND DELIVERY HOSE FOR HIGH TEMPERATURE

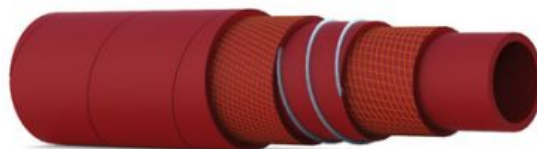

### APPLICATION

Suction and delivery hose for hot air and water, applied in engine cooling systems, very flexible

### TUBE

Red, smooth, **VMQ** silicon (available also in many other colors)

### REINFORCEMENT

High strength synthetic plies, with steel wire spirals

### COVER

Red, smooth, cloth impression silicon **VMQ**, high temperature and weather resistant (available also in many other colors)

### WORKING TEMPERATURE

-58° F + 392° F

ID		OD		WP		BP		BENDING RADIUS	VACUUM	COIL LENGTH
mm	inch	mm	inch	bar	psi	bar	psi	mm	bar	m
10	3/8	20	25/32	5	75	15	225	50	0,8	20
13	1/2	23	29/32	5	75	15	225	65	0,8	20
15	19/32	25	1	5	75	15	225	75	0,8	20
16	5/8	26	1 1/32	5	75	15	225	80	0,8	20
19	3/4	29	1 5/32	5	75	15	225	95	0,8	20
25	1	35	1 3/8	5	75	15	225	125	0,8	20
28	1 1/8	38	1 1/2	5	75	15	225	140	0,8	20
30	1 3/16	40	1 9/16	5	75	15	225	150	0,8	20
32	1 1/4	42	1 21/32	5	75	15	225	160	0,8	20
35	1 3/8	45	1 25/32	5	75	15	225	175	0,8	20
38	1 1/2	48	1 7/8	5	75	15	225	190	0,8	20
40	1 9/16	50	1 31/32	5	75	15	225	200	0,8	20
42	1 21/32	52	2 1/16	5	75	15	225	210	0,8	20
45	1 25/32	55	2 5/32	5	75	15	225	225	0,8	20
48	1 7/8	58	2 9/32	5	75	15	225	240	0,8	20
51	2	61	2 13/32	5	75	15	225	260	0,8	20

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.