


PETRODOCK HW /20 - 2W

SUCTION AND DELIVERY DOCKING HOSE FOR PETROLEUM PRODUCTS - CONVOLUTED COVER

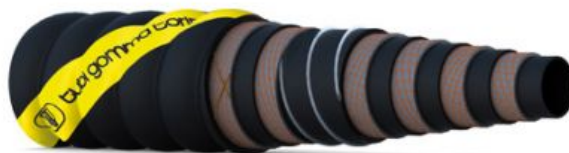

APPLICATION

Suction and delivery hose highly flexible for bunkering and docks service, for the transfer of crude oil and mixed fuels with aromatic contents up to 50%

TUBE

Black, smooth, **NBR** rubber compound

REINFORCEMENT

High strength synthetic plies, with steel wire spirals and 2 crossing copper wires for hose grounding

COVER

Black, corrugated cloth impression, **CR** rubber compound, resistant to oil, grease, sea water, ozone and flame retardant

WORKING TEMPERATURE

-22°F + 212°F

											
ID		OD		WEIGHT	WP		BP		BENDING RADIUS	VACUUM	COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	mm	bar	m
51	2	71	3 51/64	2,40	20	300	80	1200	165	0,9	MAX 40
63,5	2 1/2	83,5	3 19/64	3,15	20	300	80	1200	220	0,9	MAX 40
76	3	94	3 45/64	4,00	20	300	80	1200	270	0,9	MAX 40
102	4	132	5 3/16	5,01	20	300	80	1200	390	0,9	MAX 40
127	5	157	6 3/16	7,06	20	300	80	1200	450	0,9	MAX 40
152	6	176	6 59/64	8,93	20	300	80	1200	540	0,9	MAX 40
203	8	227	8 15/16	11,90	20	300	80	1200	720	0,9	MAX 40

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING

