


ABRAMUD SW /20

DELIVERY HOSE FOR DRILLING MUDS

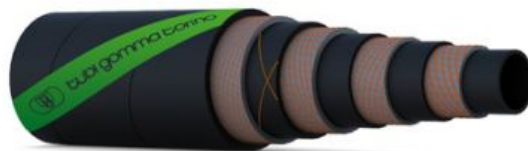

APPLICATION

Delivery hose, for drilling oil rig hose services, for petroleum muds and crude oil

TUBE

Black, smooth, **NBR/PVC** rubber compound

REINFORCEMENT


High strength synthetic cord, with crossing copper wires for hose grounding

COVER

Black, smooth cloth impression, **CR** rubber compound, resistant to oil, grease, sea water, ozone and flame retardant

WORKING TEMPERATURE

-40°F + 212°F

									
ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
76	3	96	3 25/32	3,24	20	300	80	1200	MAX 60
102	4	124	4 7/8	4,50	20	300	80	1200	MAX 60
127	5	150	5 29/32	5,82	20	300	80	1200	MAX 60
152	6	175	7	6,63	20	300	80	1200	MAX 60

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING

