


## SILCORD

WATER COOLING DELIVERY HOSE FOR MEDIUM AND HIGH TEMPERATURE

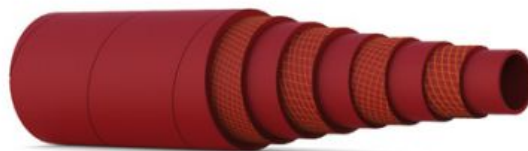

### APPLICATION

Delivery hose for hot water and coolant fluid, applied in engine cooling systems where resistance to high working temperature is required

### TUBE

Red, smooth, **VMQ** silicon (available also in many other colors)

### REINFORCEMENT

High strength polyester fiber

### COVER

Red, smooth, cloth impression silicon **VMQ**, high temperature and weather resistant (available also in many other colors)

### WORKING TEMPERATURE

-58° F + 392° F

ID		OD		WP		BP		COIL LENGTH
mm	inch	mm	inch	bar	psi	bar	psi	m
13	1/2	23	29/32	3	45	10	150	1/20
15	19/32	25	1	3	45	10	150	1/20
16	5/8	26	1 1/32	3	45	10	150	1/20
18	23/32	28	1 1/8	3	45	10	150	1/20
20	25/32	30	1 3/16	3	45	10	150	1/20
22	7/8	32	1 1/4	3	45	10	150	1/20
25	1	35	1 3/8	3	45	10	150	1/20
28	1 1/8	38	1 1/2	3	45	10	150	1/20
30	1 3/16	40	1 9/16	3	45	10	150	1/20
32	1 1/4	42	1 21/32	3	45	10	150	1/20
35	1 3/8	45	1 25/32	3	45	10	150	1/20
38	1 1/2	48	1 7/8	3	45	10	150	1/20
40	1 9/16	50	1 31/32	3	45	10	150	1/20
42	1 21/32	52	2 1/16	3	45	10	150	1/20
45	1 25/32	55	2 5/32	3	45	10	150	1/20
48	1 7/8	58	2 9/32	3	45	10	150	1/20
50	1 31/32	60	2 3/8	3	45	10	150	1/20
51	2	61	2 13/32	3	45	10	150	1/20
55	2 5/32	65	2 9/16	3	45	10	150	1/20
60	2 3/8	70	2 3/4	3	45	10	150	1/20
63,5	2 1/2	73,5	2 29/32	3	45	10	150	1/20
65	2 9/16	75	2 15/16	3	45	10	150	1/20
70	2 3/4	80	3 5/32	3	45	10	150	1/20
75	2 15/16	85	3 11/32	3	45	10	150	1/20
76	3	86	3 3/8	3	45	10	150	1/20
80	3 5/32	90	3 1/2	3	45	10	150	1/20
90	3 1/2	100	3 15/16	3	45	10	150	1/20
102	4	112	4 13/32	3	45	10	150	1/20

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.