


SERIES J SERIE J

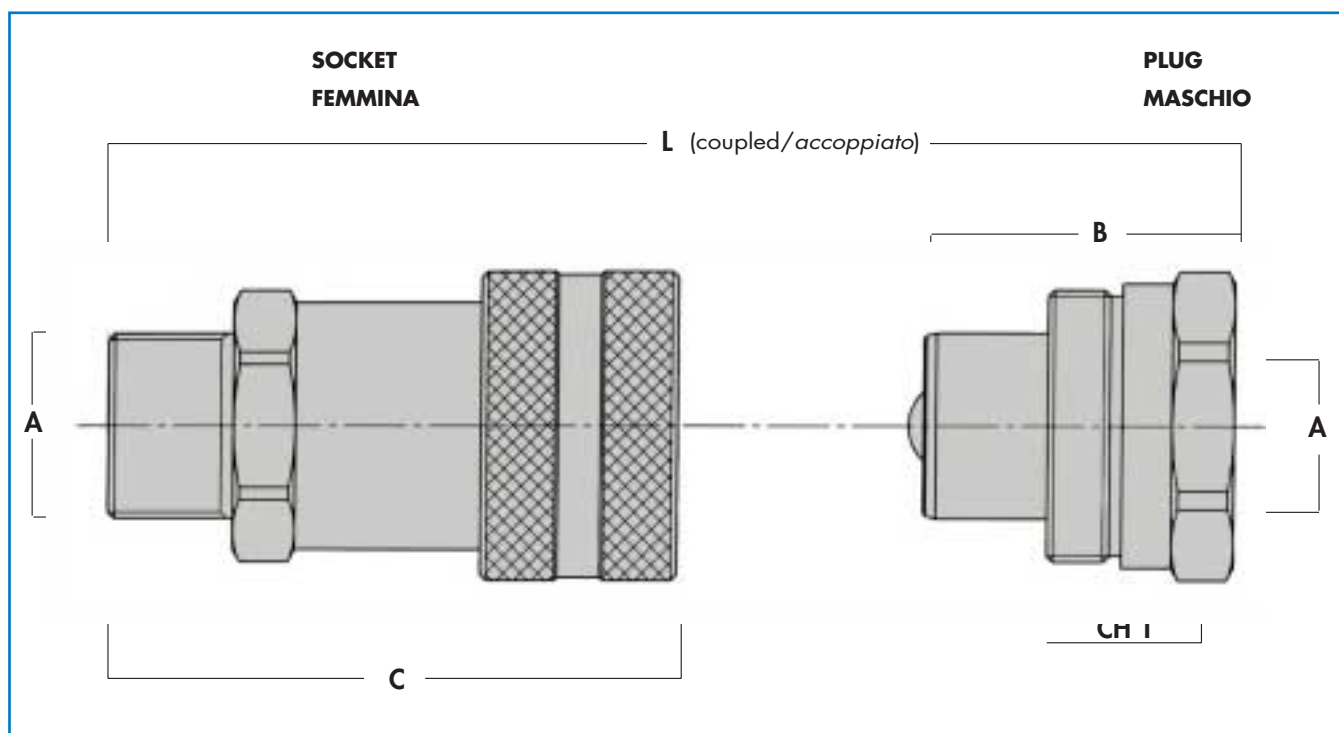

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE/CODICE		ØA	B		C		ØD		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	5	1/4"	JM25-04	JF25-04	1/4"NPT	32,5	1.28	60,8	2.39	28	1.10	74,5	2.93	19	0.75	22	0.87
06	7	1/4"	JMX25-04	JFX25-04	1/4"NPT	40	1.57	72,3	2.85	35	1.38	86,9	3.42	32	1.26	24	0.94
06	7	3/8"	JM25-06	JF25-06	3/8"NPT	40	1.57	72,3	2.85	35	1.38	86,9	3.42	32	1.26	24	0.94

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX.WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE* PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET/FEMMINA	
							kg	lbs	kg	lbs
04	5	1/4"	700	10150	2200	31900	0,080	0.177	0,150	0.330
06	7	1/4"	700	10150	1850	26825	0,120	0.266	0,200	0.444
06	7	3/8"	700	10150	1850	26825	0,120	0.266	0,200	0.444

* Coupled / Innesto accoppiato

MAIN DATA:

J Series includes screw to connect couplings designed to match the very high pressures used for hydraulic tools.

- Screw to connect
- Material: steel
- Ball valve
- Silver colour zinc passivation
- Standard seals in nitril rubber
- Back - up seals in teflon
- Working temperature with standard seals: - 20° C / +110° C
- Metal caps on request

CARATTERISTICHE PRINCIPALI:

La serie J comprende innesti a vite per le altissime pressioni tipicamente utilizzate negli utensili idraulici.

- Meccanismo di innesto a vite
- Materiale: acciaio
- Valvola a sfera
- Zincatura bianca
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature esercizio con guarnizioni standard: -20° C / + 110° C
- Tappi di metallo disponibili su richiesta