

ESJ01A

Sectional hydraulic control device

Single axis lever

DT.ESJ01A.01

FUNCTIONS AND BENEFITS


- Compact and light weight.
- Progressive and sensitive operation.
- Precise control and precise metering.
- Low operating effort.
- Optimized angular movements of joystick.
- Control element protected with rubber bellow.
- High durability and maintenance free.

TECHNICAL DATA




Maximum input pressure:
100 bar - [1450 psi]

Max backpressure on tank line:
3 bar - [43.5]

Control max flow on ports:
15 l/min - [4 GPM]



HYDRAULIC SYMBOL
Single function configuration

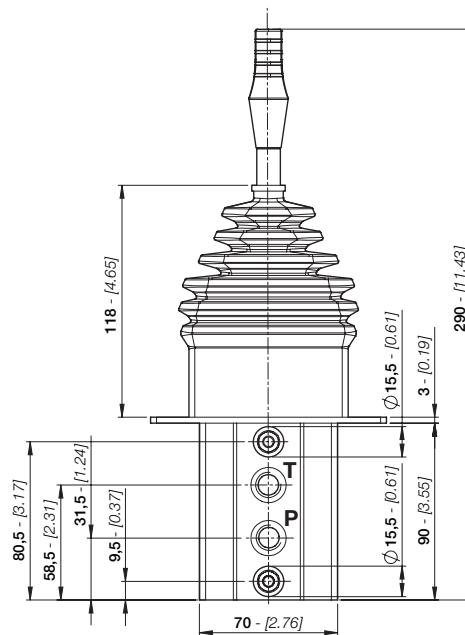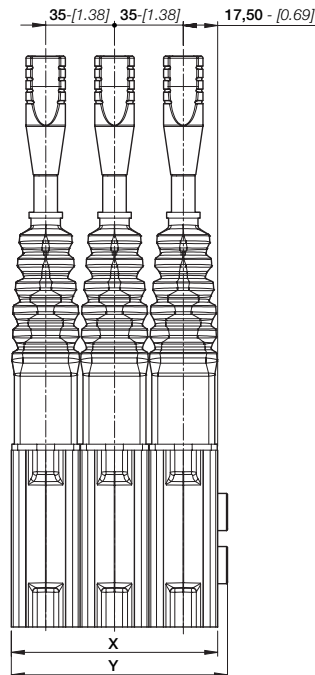

DIMENSIONS

The dimensional drawing represents a ESJ01A with 3 sections, standard assembly and BSP connections. You can configure a ESJ01A up to 12 sections.

TYPE	BSP (ISO 1179-1)	UN-UNF (ISO 11926-1)
INLET - P	G 1/4	9/16" - 18 UNF
PORTS - 1/2	G 1/4	9/16" - 18 UNF
OUTLET - T	G 1/4	9/16" - 18 UNF

ESJ01A

Sectional hydraulic control device

Single axis lever



TYPICAL CURVES


All ESJ01A servocontrols are equipped with 2 metering curves (one metering curve each service port). The metering curve classification depends on the control pressure (bar - psi) and stroke length (mm - in).

Currently two types of metering curves are available:


- **Linear curve with step (MV type)**
- **Linear curve without step (MZ type)**

All metering curves are interchangeable.

MV linear curve with step

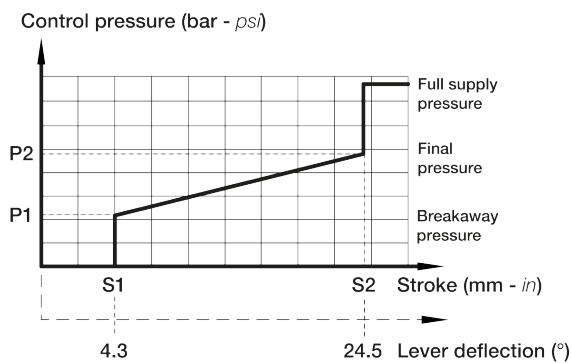

MZ linear curve without step


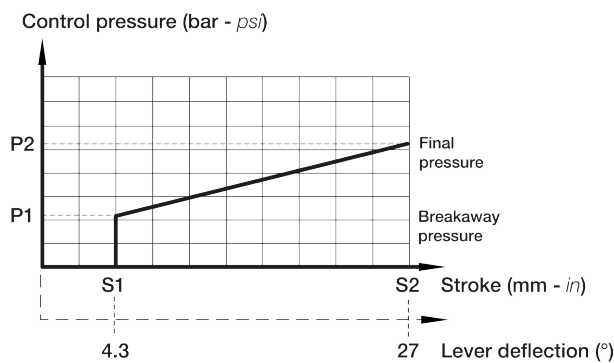


FULLY INTERCHANGEABLE WITH MOST OF COMPETITOR'S JOYSTICKS

APPLICATIONS

EBI motion controls servocontrols joysticks are used to control the work and drive hydraulics of modern mobile machines with high accuracy, safety and optimal performance.

ESJ01A are suited for specialized applications for a variety of mobile equipment such as:



OPTIONAL FEATURES

- On request are available broken line metering curves with step and broken line metering curves without step.
- To space the sections and allow the correct control of the handles, it is possible to set up the joystick with an intermediate spacer. It is identified by the code BJA0.