



VRFU 90

REGOLATORE DI FLUSSO (TENUTA A CONO)
FLOW CONTROL VALVE (POPPET TYPE)
STROMREGLER (KEGELSPERRUNG)

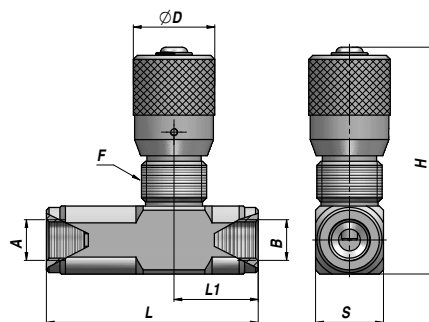

Codice Code Bestell-Nr.	A BSP	B BSP	Q MAX l/min A>B	Q MAX l/min B>A	P MAX bar	Tipo Type Typ	L	L1	ØD	F	H	S	kg
VSG521.100000	1/4"	1/4"	30	35	350	VRFU90 010	75	29	30	M25x1,5	82	25	0,40
VSG521.200000	3/8"	3/8"	40	50	350	VRFU90 020	78	31	30	M25x1,5	82	25	0,41
VSG521.300000	1/2"	1/2"	50	90	350	VRFU90 030	93	33,5	30	M25x1,5	88	30	0,58
VSG521.400000	3/4"	3/4"	80	140	320	VRFU90 040	110	41,5	42	M35x1,5	116	40	1,39
VSG521.500000	1"	1"	110	180	300	VRFU90 050	135	44,5	42	M35x1,5	116	40	1,36



MONTAGGIO IN LINEA
LINE MOUNTING
REIHENMONTAGE

MATERIALE - MATERIAL: ACCIAIO - STEEL - STAHL

UNIDIREZIONALE
UNIDIRECTIONAL
EINSEITIG GERICHTET

VRFB 90

REGOLATORE DI FLUSSO
FLOW CONTROL VALVE
STROMREGLER

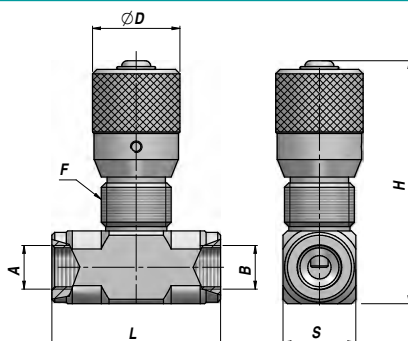

Codice Code Bestell-Nr.	A BSP	B BSP	Q MAX l/min	P MAX bar	Tipo Type Typ	L	ØD	F	H	S	kg
VSG522.100000	1/4"	1/4"	30	350	VRFB90 010	58	30	M25x1,5	82	25	0,34
VSG522.200000	3/8"	3/8"	40	350	VRFB90 020	58	30	M25x1,5	82	25	0,34
VSG522.300000	1/2"	1/2"	50	350	VRFB90 030	64	30	M25x1,5	88	30	0,43
VSG522.400000	3/4"	3/4"	80	320	VRFB90 040	89	42	M35x1,5	116	40	1,13
VSG522.500000	1"	1"	110	300	VRFB90 050	89	42	M35x1,5	116	40	1,00

MONTAGGIO IN LINEA
LINE MOUNTING
REIHENMONTAGE

MATERIALE - MATERIAL: ACCIAIO - STEEL - STAHL

BIDIREZIONALE
BIDIRECTIONAL
BEIDSEITIG GERICHTET